

Infitek

## PH METERS



Infitek



Infitek



Infitek



Infitek



Infitek

Infitek

### Infitek Co., Ltd.

TEL: +86-531-88982330

FAX: +86-531-88983691

Website: infitek.com

Email: info@infitek.com

Service: support@infitek.com

Address: Room 201, Building A, No.1 Qianwan 1st Road, Qianhai  
Shenzhen-Hong Kong Cooperation Zone, Shenzhen (Settled in  
Shenzhen Qianhai Business Secretary Co., Ltd.)

US Office

### INFITEK INC.

522W RIVERSIDE AVE STE N,SPOKANE,WA 99201

EMAIL: INFO@INFITEK.COM



VERSION.2025

# Benchtop pH Meter

PH-B100B



### Feature

- ◆ IP54 waterproof.
- ◆ 6-inch LCD display screen.
- ◆ 1-2 points calibration with standard recognition.

### Advantages



Manual temperature compensation ensures accurate result



Reset feature automatically resumes all settings back to factory default options.



6-inch LCD display screen.



IP54 waterproof.



1-2 points calibration with Standard Recognition.



- PH-B100B pH Meter 1 Set
- E-201F pH composite electrode 1 Piece
- Power adapter DC 9V(European plug model, QD24-0902000-A1) 1 Piece
- Electrode clip assembly 1 Piece
- Electrode stem 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

### Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

### Specifications

Model		PH-B100B
Parameters		pH/mV
pH	Range	0.00 to 14.00 pH
	Resolution	0.01pH
	Accuracy	±0.01 pH
	Calibration Points	Up to 2
	Standard Recognition	NIST buffers
mV	Range	-1800 to 1800 mV
	Resolution	1 mV
	Accuracy	±0.1%FS
Measurement	Reading Mode	Continuous
	Temp. Compensation	MTC
Inputs	pH Electrode	BNC(Q9)
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP54
General	Electricity	AC Adapter, 100-240V AC input, DC9V output
	Dimensions	200×160×63 mm
	Package Dimension	W460×D290×H340mm
	G.W./N.W.	2.4kg/0.6kg

Benchtop pH Meter

PH-B200EM



Feature

- ◆ IP54 waterproof.
- ◆ Data storage 50 sets for each parameter.
- ◆ 1-3 points calibration with standard recognition.
- ◆ High resolution LCD display screen, 6.0 inches.

Advantages



Auto-hold feature senses and locks the measurement endpoint.



Reset feature automatically resumes all settings back to factory default options.



6-inch high resolution LCD display screen.



Manual temperature compensation ensures accurate results



Data storage 50 sets for each parameter.



Multi-reading feature allows auto-read and continuous-read.



IP54 waterproof.



1-3 points calibration with standard recognition.



- PH-B200EM pH Meter 1 Set
- E-201F pH composite electrode 1 Piece
- REX-5 electrode stand 1 Set
- Power adapter DC 9V(European plug model, QD24-0902000-A1) 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Dust cover (Key function version) 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

Specifications

Model		PH-B200EM
Parameters		pH/mV
pH	Range	-2.00 to 18.00 pH
	Resolution	0.01pH
	Accuracy	±0.01 pH
	Calibration Points	Up to 3
	Standard Recognition	NIST buffers
mV	Range	-1999 to 1999 mV
	Resolution	1 mV
	Accuracy	±0.1%FS
Measurement	Reading Mode	Auto Read, Continuous
	Reading Prompts	Reading, Stable, Locked
Data management	Temp. Compensation	MTC
	Data Storage	50 results each
Inputs	pH Electrode	BNC(Q9)
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP54
General	Electricity	AC Adapter, 100-240V AC input, DC9V output
	Dimensions	W242×D195×H68 mm
	Package Dimension	W360×D300×H230 mm
	N.W./G.W.	900g/2.6kg

# Benchtop pH Meter

PH-B200E



### Feature

- ◆ IP54 waterproof.
- ◆ Data storage 50 sets for each parameter.
- ◆ 1-3 points calibration with standard recognition.
- ◆ High resolution LCD display screen, 6.0 inches.

### Advantages



Automatic/Manual temperature compensation ensures accurate results.



Reset feature automatically resumes all settings back to factory default options.



6-inch high resolution LCD display screen.



Auto-hold feature senses and locks the measurement endpoint.



Data storage 50 sets for each parameter.



Multi-reading feature allows auto-read and continuous-read.



IP54 waterproof.



1-3 points calibration with standard recognition.

- PH-B200E pH Meter 1 Set
- E-301-QC 3 in 1 pH composite electrode 1 Piece
- REX-5 electrode stand 1 Set
- Power adapter DC 9V(European plug model, QD24-0902000-A1) 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Dust cover (Key function version) 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece



### Specifications

Model		PH-B200E
Parameters		pH/Temp.(mV)
pH	Range	-2.00 to 18.00 pH
	Resolution	0.01 pH
	Accuracy	±0.01 pH
	Calibration Points	Up to 3
	Standard Recognition	NIST buffers
mV	Range	-1999 to 1999 mV
	Resolution	1 mV
	Accuracy	±0.1%FS
Temperature	Range	-5 to 110 °C(23 to 230 °F)
	Unit	°C
	Resolution	0.1
	Accuracy	±0.2
Measurement	Reading Mode	Auto Read, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	50 results each
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	4-pin aviation connector
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP54
General	Electricity	AC Adapter, 100-240V AC input, DC9V output
	Dimensions	242×195×68 mm
	Package Dimension (W*D*H)	370×300×240mm
	G.W./N.W.	2.7kg/0.9kg

### Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

# Benchtop pH Meter

PH-B300F



## Features

- IP54 waterproof.
- Data storage 500 sets (GLP-compliant).
- Support for USB and RS-232 communication.



## Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

- High resolution LCD display, 5.7 inches.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic electrode diagnosis with pH slope and offset display.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Selectable pH buffer groups, including NIST, DIN, GB.
- Reset feature automatically resumes all settings back to factory default options.
- Data storage 500 sets (GLP-compliant).
- Support for USB and RS-232 communication.
- IP54 waterproof.
- 1-5 points calibration with standard recognition.



- PH-B300F pH Meter 1 Set
- E-301-QC 3 in 1 pH composite electrode 1 Piece
- REX-5 electrode stand 1 Set
- Power adapter DC 9V(European plug model, QD24-0902000-A1) 1 Piece
- Universal USB cable 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Dust cover (Key function version) 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

## Specifications

Model		PH-B300F
Parameters		pH/Temp.(mV)
pH	Range	-2.00 to 20.00pH
	Resolution	0.1, 0.01 pH
	Accuracy	±0.01 pH
	Calibration Points	Up to 5
	Standard Customization	Yes
	Standard Recognition	NIST, GB and DIN buffers
mV	Range	-2000.0 to 2000.0 mV
	Resolution	0.1 mV
	Accuracy	±0.3 mV or ±0.1%
Temperature	Range	-5 to 110 °C, 23 to 230 °F
	Unit	°C, °F
	Resolution	0.1
	Accuracy	±0.2
Measurement	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	500 results each
	GLP Features	Yes
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	4-pin aviation connector
Outputs	USB	USB 2.0 flash memory device, PC
	RS 232	printer
Display options	Backlight	Yes
	Auto Shutdown	1~60 min, off
	IP Rating	IP54
	Date and Time	Yes
General	Electricity	AC Adapter, 100~240V AC input, DC9V output
	Dimensions	242×195× 68 mm
	Weight	900g
	Package size	(W*D*H)360*300*240mm 2.7kg



# Benchtop pH Meter

PH-B400F



## Features

- IP54 waterproof.
- 1-5 points calibration with Standard Recognition.
- High resolution LCD display
- Support for USB and RS-232 communication.



## Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

- 5.7-inch high resolution LCD display.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic electrode diagnosis with pH slope and offset display.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Selectable pH buffer groups, including NIST, DIN, GB.
- Reset feature automatically resumes all settings back to factory default options.
- Data Storage 500 sets (GLP-compliant).
- Support for USB and RS-232 communication.
- IP54 waterproof.
- 1-5 points calibration with standard recognition.

PH-B400F pH Meter 1 Set

E-301-QC 3 in 1 pH composite electrode 1 Piece

REX-5 electrode stand 1 Set

Power adapter DC 9V(European plug model, QD24-0902000-A1) 1 Piece

Universal USB cable 1 Piece

Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each

Dust cover (Key function version) 1 Piece

Operation quick guide 1 Piece

Instruction manual 1 Piece

## Specifications

Model		PH-B400F
Parameters		pH/Temp.(mV)
pH	Range	-2.000 to 20.000 pH
	Resolution	0.1, 0.01, 0.001pH
	Accuracy	±0.002 pH
	Calibration Points	Up to 5
	Standard Customization	Yes
	Standard Recognition	NIST, GB, DIN, USA and MERK buffers
mV	Range	-2000.00 to 2000.00 mV
	Resolution	0.1, 0.01 mV
	Accuracy	±0.1 mV or ±0.03%
Temperature	Range	-10 to 135 °C, 14 to 275 °F
	Unit	°C, °F
	Resolution	0.1
	Accuracy	±0.1
Measurement	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	500 results each
	GLP Features	Yes
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	4-pin aviation connector
Outputs	USB	USB 2.0 flash memory device, PC
	RS 232	printer
Display options	Backlight	Yes
	Auto Shutdown	1~60 min, off
	IP Rating	IP54
	Date and Time	Yes
General	Electricity	AC Adapter, 100-240V AC input, DC9V output
	Dimensions	242×195× 68 mm
	Weight	900g

# Benchtop pH Meter

PH-B500T



## Features

- IP54 waterproof.
- 1-6 points calibration with Standard Recognition.
- Color High contrast LCD touchscreen
- Support for USB and RS-232 communication.



## Description

PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

- 7-inch color high contrast LCD touchscreen.
- Intelligent operation system provides features including user management, calibration management, method management, data management and etc.
- Automatic electrode diagnosis with pH slope and offset display.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Selectable pH buffer groups, including DIN, NIST, USA, MERK, JIS, GB.
- Reset feature automatically resumes all settings back to factory default options.
- Data Storage 1000 sets for each parameter (GLP-compliant).
- Data analysis feature helps user review, compare and recalculate results.
- Support for USB and RS-232 communication.
- IP54 waterproof.
- 1-6 points calibration with standard recognition.
- Support for pH standard group customization.



- PH-B500T pH Meter 1 Set
- 962201 pH composite electrode (Premium) 1 Piece
  - T-818-Q Temperature probe 1 Piece
  - Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
  - REX-6 electrode stand 1 Piece
  - GC65-240270-F Power adapter DC24V 1 Piece
  - Dust cover (Touch screen version) 1 Piece
  - European standard power cord(3VTJ2) 1 Piece
  - Universal USB cable 1 Piece
  - Touch pen (Capacitive screen) 1 Piece
  - Operation quick guide 1 Piece
  - Instruction manual 1 Piece

## Specifications

Model		PH-B500T
Parameters		pH/Temp.(mV/ORP)
pH	Range	-2.000 to 20.000 pH
	Resolution	0.1, 0.01, 0.001pH
	Accuracy	±0.002 pH
	Calibration Points	Up to 6
	Standard Customization	Yes
	Calibration Reminder	Yes
	Standard Recognition	NIST, GB, DIN, USA, MERK, JIS buffers
mV/ORP	Slope Limit	Yes
	Range	-2000.00 to 2000.00 mV
	Resolution	0.1, 0.01 mV
	Accuracy	±0.1 mV or ±0.03%
	EH ORP Mode	Yes
Temperature	ORP Calibration Points	1 custom point (relative mV)
	Range	-10 to 135 °C, 14 to 275 °F
	Unit	°C, °F
	Resolution	0.1
Measurement	Accuracy	±0.1
	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
Data management	Temp. Compensation	ATC, MTC
	Data Storage	1000 Groups
	GLP Features	Yes
Inputs	Log Management	Yes
	pH Electrode	BNC(Q9)
Outputs	Temp. Probe	4-pin aviation connector
	USB	USB 2.0 flash memory device, PC
Display options	RS 232	printer, scanner, auto-sampler
	Backlight	Yes
	Auto Shutdown	1~60 min, off
	IP Rating	IP54
General	Date and Time	Yes
	Electricity	AC Adapter, 100-240V AC input, DC24V output
	Dimensions	220×195×68 mm
Weight		950g

Benchtop pH Meter

PH-B600L



Features

IP54 waterproof.

1-6 points calibration with Standard Recognition.

Support for pH standard group customization.



- 7-inch high contrast LCD touch screen.
- Intelligent operation system provides features including user management, calibration management, method management, data management and etc.
- Automatic electrode diagnosis with pH slope and offset display.



- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Selectable pH buffer groups, including NIST, DIN, GB.



- Reset feature automatically resumes all settings back to factory default options.



- Data Storage 1000 sets for each parameter (GLP-compliant).
- Data analysis feature helps user review, compare and recalculate results.



- IP54 waterproof



- 1-6 points calibration with standard recognition.
- Support for pH standard group customization.

Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

- PH-B600L pH Meter 1 Set
- E-201-L pH composite electrode 1 Piece
- T-818-L Temperature probe 1 Piece
- Standard pH Buffer Buffer powder(pH4.01, 7.00, 10.01) 1 set
- GM65-240270 AC/DC Power adapter 1 Piece
- Touch pen 1 Piece
- Dust cover 1 Piece
- REX-3 Electrode stand 1 Set
- Mini USB communication cable 1 Piece
- European standard power cord(3VTJ2) 1 Piece
- Ground wire(DC401) 1 Piece
- Instruction manual 1 Piece
- Operation guide 1 Piece

Specifications

Model		PH-B600L
Parameters		pH/Temp.(mV/ORP)
pH	Range	-2.000 to 20.000 pH
	Resolution	0.1, 0.01, 0.001pH
	Accuracy	±0.002 pH
	Calibration Points	Up to 6
	Standard Customization	Yes
	Calibration Reminder	Yes
	Standard Recognition	NIST, GB, DIN buffers
	Slope Limit	Yes
mV/ORP	Range	-2000.00 to 2000.00 mV
	Resolution	0.1, 0.01 mV
	Accuracy	±0.03%FS
Temperature	Range	-5 to 130 °C
	Unit	°C
	Resolution	0.1
Measurement	Accuracy	±0.1
	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	1000 Groups
	GLP Features	Yes
	Log Management	Yes
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	6-pin Mini-DIN
Outputs	USB, RS 232	USB 2.0 flash memory device, printer, PC
Display options	Backlight	Yes
	Auto Shutdown	1~60 min, off
	IP Rating	IP54
	Date and Time	Yes
General	Electricity	AC Adapter, 100-240V AC input, DC24V output
	Dimensions	280×280×130 mm
	Package Dimension	W390×D330×H360mm
	G.W./N.W.	4.4Kg/2.5Kg



# Benchtop pH Meter

BEP-M210    BEP-M920



## Features

- BEP-M210 :**
- 1 to 3 points calibration with automatic recognition for USA and NIST buffers
  - Automatic electrode diagnosis helps user decide whether to replace the pH electrode
  - Automatic temperature compensation ensures accurate readings over the entire range
- pH BEP-M920 :**
- 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers
  - Automatic electrode diagnosis shows the pH slope and offset
  - Automatic temperature compensation ensures accurate readings over the entire range
  - Calibration due alarm prompts user to calibrate the meter regularly
- ORP BEP-M920 :**
- 1 point offset calibration allows adjusting the displayed value to a known standard
  - Relative and absolute millivolt modes ensure the reliable ORP measurements

**Measurement Parameters**

BEP-M210: pH, mV, temperature

BEP-M920: pH, mV, relative mV, temperature



## General Features

- Auto-Read function senses and locks the measurement endpoint
- Setup menu allows setting the pH buffer set, number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.
- Reset function automatically resumes all settings back to the factory defaults
- Expanded memory stores or recalls up to 500 data sets

## Specifications

Model	BEP-M210	BEP-M920
<b>pH</b>		
Range	-1.00~15.00pH	-2.000~20.000pH
Resolution	0.01pH	0.001, 0.01, 0.1pH, selectable
Accuracy	±0.01pH	±0.002pH
Calibration Points	1 to 3 points	1 to 5 points
pH Buffer Options	USA(4.01/7.00/10.01),NIST(4.01/6.86/9.18)	USA, NIST, DIN, 2 custom buffers
<b>ORP</b>		
mV Range	±1999mV	
Relative mV Range	/	±1999mV
Resolution	1mV	0.1, 1mV, selectable
Accuracy	±1mV	±0.2mV
Calibration Points	/	1 point
<b>Temperature</b>		
Range	0~105°C/32~221°F	
Resolution	0.1°C/0.1°F	
Accuracy	±1°C/±1.8°F	±0.5°C/±0.9°F
Offset Calibration	1 point, reading ±10°C	
<b>Other Specifications</b>		
Temperature Compensation	0~100°C, manual or automatic	
Stability Criteria	/	Low or high
Calibration Due Alarm	/	1 to 31 days or off
Slope/Offset Display	/	Yes
Hold Function	Manual or auto-endpoint	
Memory	/	500 data sets
Communication Interface	/	USB
Connector	BNC,3.5mm jack socket	
Display	Custom LCD(120×60mm)	Custom LCD(125×100mm)
Power Requirements	DC9V power adapter	DC5V power adapter
Dimensions	210(L)×205(W)×75(H)mm	210(L)×188(W)×60(H) mm
Weight	1.5kg	

## Ordering Information

- BEP-M210/920-CN: Meter, E201-BNC plastic body pH electrode, temperature probe, pH buffer sachets, electrode holder, USB cable (for BEP-M920 only) and power adapter
- BEP-M210/920-UK: Meter, P11 glass pH electrode, temperature probe, pH buffer sachets, electrode holder, USB cable (for BEP-M920 only) and power adapter
- BEP-M920-ORP: Meter, E201-BNC plastic body pH electrode, 501 ORP electrode, temperature probe, pH buffer sachets, electrode holder, USB cable and power adapter



Portable pH Meter

BEP-M220



Features



1 to 3 points calibration with automatic recognition for USA and NIST buffers



Expanded memory stores or recalls up to 100 data sets



Reset function automatically resumes all settings back to the factory defaults



Setup menu allows to set the pH bufferset, number of calibration points, temperature unit, auto-power off, etc.

Measurement Parameters  
pH, mV, temperature  
BEP-M220 Features



- Automatic electrode diagnosis helps user decide whether to replace the pH electrode
- Automatic temperature compensation ensures accurate readings over the entire range
- Auto-Read function senses and locks the measurement endpoint



Specifications

Model	BEP-M220
<b>pH</b>	
Range	-2.00 to 20.00pH
Resolution	0.01pH
Accuracy	±0.01pH
Calibration Points	1 to 3 points
pH Buffer Options	USA (pH4.01/7.00/10.01), NIST (pH4.01/6.86/9.18)
<b>mV</b>	
Range	±1999mV
Resolution	1mV
Accuracy	±1mV
<b>Temperature</b>	
Range	0 to 105°C/32 to 221°F
Resolution	0.1°C/0.1°F
Accuracy	±0.5°C/±0.9°F
Offset Calibration	1 point
Calibration Range	Reading ±10°C
<b>General Specifications</b>	
Temperature Compensation	0 to 100°C/32 to 212°F, manual or automatic
Auto-Power Off	30 minutes after the last key is pressed
Memory	Stores up to 100 data sets
Output	USB communication interface
Connector	BNC, 3.5mm jack socket
Display	Custom LCD (80×60mm)
Power	3×1.5V AA batteries or DC5V power adapter
Battery Life	Approximately 150 hours (turn off the backlight)
Dimensions	170(L)×85(W)×30(H)mm
Weight	300g

Portable pH Meter

BEP-M221



Measurement Parameters

pH, mV, relative mV, temperature



Multi-mode powerscheme (batteries, power adapter and USB port) ensures that using Reset function automatically resumes all settings back to the factory defaults

pH



1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers



Calibration due alarm prompts user to calibrate the meter regularly

ORP



1 point offset calibration allows adjusting the displayed value to a known standard



Expanded memory stores or recalls up to 500 data sets  
Relative and absolute millivolt modes ensure the reliable ORP measurements General Features



Automatic temperature compensation ensures accurate readings over the entire range



Automatic electrode diagnosis shows the pH slope and offset



Auto-Read function senses and locks the measurement endpoint  
Auto-Power Off effectively conserves battery life



Setup menu allows to set the pH buffer set, number of calibration points, resolution, stability criteria, temperature unit, date and time, etc.



Specifications

Model	BEP-M221
<b>pH</b>	
Range	-2.000 to 20.000pH
Resolution	0.001, 0.01, 0.1pH, selectable
Accuracy	±0.002pH
Calibration Points	1 to 5 points
pH Buffer Options	USA, NIST, DIN, 2 custom buffers
<b>ORP</b>	
Range	±1999.9mV
Resolution	0.1, 1mV, selectable
Accuracy	±0.2mV
Calibration Points	1 point
Measurement Modes	Relative or absolute mV
<b>Temperature</b>	
Range	0 to 105°C/32 to 221°F
Resolution	0.1°C/0.1°F
Accuracy	±0.5°C/±0.9°F
Offset Calibration	1 point
Calibration Range	Reading ±10°C
<b>General Specifications</b>	
Temperature Compensation	0 to 100°C/32 to 212°F, manual or automatic
Stability Criteria	Low or high
Calibration Due Alarm	1 to 31 days or off
Auto-Power Off	10, 20 or 30 minutes after last key pressed
Memory	Stores up to 500 data sets
Output	USB
Connector	BNC, 3.5mm jack socket
Display	Custom LCD (80×60mm)
Power	3×1.5V AA batteries or DC5V power adapter
Battery Life	Approximately 150 hours (turn off the backlight)
Dimensions	170(L)×85(W)×30(H)mm
Weight	300g

Portable pH Meter

PH-P110B



Features

- IP65 waterproof.
- 1-2 points calibration with Standard Recognition.
- 3.5-inch LCD display screen.



Features

- 3.5-inch LCD display screen.
- Reset feature automatically resumes all settings back to factory default options.
- Auto-power off feature effectively extends the battery service life.
- IP65 waterproof.
- 1-2 points calibration with standard recognition.
- Manual temperature compensation ensures accurate results

PH-P110B Portable pH meter 1 Set

E-201F pH composite electrode 1 Piece

Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each

Power adapter DC 5V 2A(European plug model, GAT-0502000) 1 Piece

Electrode holder 2 Pieces

MicroUSB cable 1 Piece

Silicone rubber case (Installed on the host) 1 Piece

Wristband assembly (Small) 1 Piece

Operation quick guide 1 Piece

Instruction manual 1 Piece

Description

PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

Specifications

Model		PH-P110B
Parameters		pH/mV
pH	Range	-0.00 to 14.00pH
	Resolution	0.01pH
	Accuracy	±0.03 pH
	Calibration Points	Up to 2
	Auto Standard Recognition	NIST buffers
mV	Range	-1400.0 to 1400.0 mV
	Resolution	1 mV
	Accuracy	±0.2%FS
Measurement	Reading Mode	Continuous
	Reading Prompts	Reading, Stable
	Temp. Compensation	MTC
Inputs	pH Electrode	BNC(Q9)
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP65
General	Electricity	Rechargeable Lithium battery, AC Adapter, 100~240V AC input, DC5V output
	Dimensions	80×225×35 mm
	Weight	400g



Portable pH Meter

PH-P210E



Features

- IP65 waterproof.
- 1-3 points calibration with Standard Recognition.
- 3.5-inch LCD display screen.
- Data capacity of up to 200 sets for each parameter.



Features

- 3.5-inch LCD display screen.
- Multi-reading feature allows auto-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Data capacity of up to 200 sets for each parameter.
- Auto-power off feature effectively extends the battery service life.
- Reset feature automatically resumes all settings back to factory default options.
- IP65 waterproof.
- 1-3 points calibration with standard recognition.
- Automatic/Manual temperature compensation ensures accurate results



- PH-P210E pH Meter 1 Set
- E-301-QC 3 in 1 pH composite electrode 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Power adapter DC 5V 2A(European plug model, GAT-0502000) 1 Piece
- Electrode holder 2 Pieces
- MicroUSB cable 1 Piece
- Silicone rubber case (Installed on the host) 1 Piece
- Wristband assembly (Small) 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

Specifications

Model		PH-P210E
Parameters		pH/Temp.(mV)
pH	Range	-2.00 to 18.00 pH
	Resolution	0.01pH
	Accuracy	±0.01 pH
	Calibration Points	Up to 3
	Auto Standard Recognition	NIST buffers
mV	Range	-1999 to 1999 mV
	Resolution	1 mV
	Accuracy	±0.1%FS
Temperature	Range	-5 to 110 °C, 23 to 230 °F
	Unit	°C, °F
	Resolution	0.1
	Relative Accuracy	±0.2
Measurement	Reading Mode	Auto Read, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	200 results each
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	4-pin aviation connector
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP65
General	Electricity	Rechargeable Lithium battery, AC Adapter, 100-240V AC input, DC5V output
	Dimensions	80×225×35 mm
	Weight	400g

Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.

Portable pH Meter

PH-P310F   PH-P310T



Features

- IP65 waterproof.
- 1-5 points calibration with Standard Recognition.
- 3.5-inch LCD display screen.
- Support for USB communication.



Features

- 3.5-inch LCD display screen.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Data capacity of up to 500 sets for each parameter (GLP-compliant).
- Support for USB communication.
- Auto-power off feature effectively extends the battery service life.
- Reset feature automatically resumes all settings back to factory default options.
- IP65 waterproof.
- 1-5 points calibration with standard recognition.
- Selectable pH buffer groups, including NIST, DIN, GB.
- Automatic electrode diagnosis with pH slope and offset display.

Specifications

Model		PH-P310F	PH-P310T
Parameters		pH/Temp.(mV)	
pH	Range	-2.00 to 20.00pH	
	Resolution	0.1, 0.01 pH	
	Accuracy	±0.01 pH	
	Calibration Points	Up to 5	
	Standard Customization	Yes	
	Standard Recognition	NIST, GB and DIN buffers	
	Slope Limit	Yes	
mV	Range	-2000.0 to 2000.0 mV	
	Resolution	0.1	
Temperature	Accuracy	±0.3 mV or ±0.1%	
	Range	-5 to 110 °C, 23 to 230 °F	
	Unit	°C, °F	
	Resolution	0.1	
Measurement	Relative Accuracy	±0.2	
	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous	
	Reading Prompts	Reading, Stable, Locked	
Data management	Temp. Compensation	ATC, MTC	
	Data Storage	500 results each	1000 Groups
	GLP Features	Yes	
Inputs	pH Electrode	BNC(Q9)	
	Temp. Probe	4-pin aviation connector	
Outputs	USB	PC, printer	
Display options	Backlight	Yes	
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off	
	IP Rating	IP65	
	Date and Time	Yes	
General	Electricity	Rechargeable Lithium battery, AC Adapter, 100-240V AC input, DC5V output	
	Dimensions	W80×D255×H35 mm	90 x 255 x 40 mm
	Package Dimension (W*D*H)(mm)	W360×D300×H180mm	/
	G.W./N.W.(kg)	2.3kg/0.4kg	N.W.0.5kg

Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.



- PH-P310F pH Meter 1 Set
- E-301-QC 3 in 1 pH composite electrode 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Power adapter DC 5V 2A(European plug model, GAT-0502000) 1 Piece
- Electrode holder 2 Pieces
- MicroUSB cable 1 Piece
- MicroUSB to DB25 printing cable 1 Piece
- Silicone rubber case (Installed on the host) 1 Piece
- Wristband assembly (Small) 1 Piece
- Carrying case 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

PH-P310F



- PH-P310T pH Meter 1 Set
- E-301-QC 3 in 1 pH composite electrode 1 Piece
- Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each
- Power adapter DC 5V 2A(European plug model, GAT-0502000) 1 Piece
- Electrode holder 2 Pieces
- MicroUSB cable 1 Piece
- MicroUSB to DB25 printing cable 1 Piece
- Touch pen (Capacitive screen) 1 Piece
- Silicone rubber case (Installed on the host) 1 Piece
- Wristband assembly (Large) 1 Piece
- Carrying case 1 Piece
- Operation quick guide 1 Piece
- Instruction manual 1 Piece

PH-P310T





# Portable pH Meter

PH-P510T



## Features

- IP65 waterproof.
- 1-8 points calibration with Standard Recognition.
- 4.3-inch color high contrast LCD touch screen
- Support for USB communication.



## Features

- Color High contrast LCD touchscreen, 4.3 inches.
- Intelligent operation system provides features including user management, calibration management, electrode management, method management, data management, Log Management and etc.
- Multi-reading feature allows auto-read, timed-read and continuous-read.
- Automatic/Manual temperature compensation ensures accurate results.
- Auto-hold feature senses and locks the measurement endpoint.
- Data Storage 1000 sets for each parameter (GLP-compliant).
- Data analysis feature helps user review, compare and recalculate results.
- Auto-power off feature effectively extends the battery service life.
- Reset feature automatically resumes all settings back to factory default options.
- 1-8 points calibration with standard recognition.
- Selectable pH buffer groups, including USA, NIST, DIN, GB, MERK, JIS.
- User-defined pH buffer or buffer group is supported.
- Automatic electrode diagnosis with pH slope and offset display.

## Specifications

Model		PH-P510T
Parameters		pH/Temp.(mV/ORP)
pH	Range	-2.000 to 20.000 pH
	Resolution	0.1, 0.01, 0.001pH
	Accuracy	±0.002 pH
	Calibration Points	Up to 8
	Standard Customization	Yes
	Calibration Reminder	Yes
	Standard Recognition	USA, NIST, MERK, JIS, GB and DIN buffers
	Slope Limit	Yes
mV/ORP	Range	-2000.00 to 2000.00 mV
	Resolution	0.1, 0.01 mV
	Accuracy	±0.1 mV or ±0.03%
	EH ORP Mode	Yes
	ORP Calibration Points	1 custom point (relative mV)
Temperature	Range	-10 to 135 °C, 14 to 275 °F
	Unit	°C, °F
	Resolution	0.1
	Accuracy	0.1
Measurement	Reading Mode	Auto Read (Fast, Medium, Slow), Timed, Continuous
	Reading Prompts	Reading, Stable, Locked
	Temp. Compensation	ATC, MTC
Data management	Data Storage	1000 Groups
	GLP Features	Yes
Inputs	pH Electrode	BNC(Q9)
	Temp. Probe	4-pin aviation connector
Outputs	USB	USB 2.0 flash memory device, PC, scanner
Display options	Backlight	Yes
	Auto Shutdown	300, 600, 1200, 1800, 3600 sec., off
	IP Rating	IP65
	Date and Time	Yes
General	Electricity	Rechargeable Lithium battery, AC Adapter, 100-240V AC input, DC5V output
	Dimensions	90×255×40 mm
	Weight	500g

## Description



PH measurement has a wide range of applications. It is now widely used in colleges, environmental protection, medicine, food, health, geological exploration, metallurgy, marine exploration and other fields. PH measurement is required for common acid rain detection, surface water, industrial wastewater, drinking water, beverages, daily chemical products, textiles, etc.





- PH-P510T pH Meter 1 Set**  
E-301-QC 3 in 1 pH composite electrode 1 Piece  
Standard pH Buffer Solution (50mL) (pH4.01, 7.00, 10.01) 1 Bottle each  
Power adapter DC 5V 2A(European plug model, GAT-0502000) 1 Piece  
Electrode holder 2 Pieces  
MicroUSB cable 1 Piece  
OTG adapter cable (MicroUSB connector) 1 Piece  
Touch pen (Capacitive screen) 1 Piece  
Silicone rubber case (Installed on the host) 1 Piece  
Wristband assembly (Large) 1 Piece  
Carrying case 1 Piece  
Operation quick guide 1 Piece  
Instruction manual 1 Piece



Pocket pH Meter

PH-P10F PH-P10S PH-P10L



PH-P10F



PH-P10S



PH-P10L



Features



Waterproof pocket pH tester with an easy-to-read LCD display.



2 points push-button calibration with auto-buffer recognition.



Auto-Power Off effectively conserves battery life.



Hold function momentarily freezes reading for easy viewing and recording.



Replaceable electrode module reduces maintenance and replacement cost.



Waterproof feature to ensure complete protection in harsh environment.

Features & Applications

Flat surface pH-sensitive membrane is suitable for measuring the semi solids.



PH-P10F

- ◆ Food and beverage
- ◆ Skin and paper measurements


Circular pH-sensitive membrane fully senses the pH of liquids.



PH-P10S

- ◆ Swimming pool and spa
- ◆ Aquariums
- ◆ Education applications

Long-reach pH electrode is suitable for measuring the pH value of samples inside small containers.

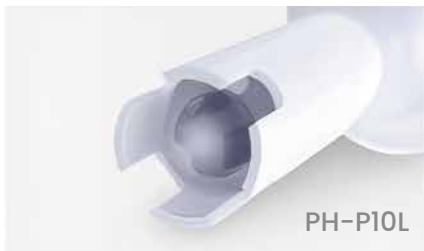

PH-P10L

- ◆ Paint and dye testing
- ◆ Brewing and other industrial applications

Specifications

Model	PH-P10F	PH-P10S	PH-P10L
Range	0.0 to 14.0pH		
Resolution	0.1pH		
Accuracy	±0.1pH		
Calibration Points	2 points		
pH Buffer Options	USA (pH4.01/7.00/10.01)		
Hold Function	Manual		
Auto-Power Off	8 minutes after last key pressed		
Display	Single-line LCD (21×21mm)		
Power	3×1.5V LR44 micro alkaline batteries		
Battery Life	Approximately 150 hours of continuous use		
Dimensions	185(L)×40(Dia.)mm		240(L)×40(Dia.)mm
Weight	100g		
Package size	(W*D*H)300*110*60mm		0.4kg

Pocket pH Meter

PH-P20F PH-P20S PH-P20L



PH-P20F



PH-P20S



PH-P20L



Features



Automatic temperature compensation ensures accurate readings over the entire range.



2 points push-button calibration with auto-buffer recognition.



Auto-Power Off effectively conserves battery life.



Hold function momentarily freezes reading for easy viewing and recording.



Replaceable electrode module reduces maintenance and replacement cost.



Waterproof feature to ensure complete protection in harsh environment.

Features & Applications

Economical pocket pH tester is equipped with a flat surface pH electrode.



PH-P20F

- ◆ Soil analysis
- ◆ Printing and cosmetics industries
- ◆ Other industrial applications

Economical pocket pH tester is equipped with a circular glass bulb electrode.



PH-P20S

- ◆ Water and wastewater treatment
- ◆ Research and education
- ◆ Environmental monitoring and other industrial applications

Economical pocket pH tester, 2 points calibration, Automatic Temperature Compensation. The meter is suitable for measuring the pH value of samples inside small containers, accuracy: 0.05pH.



PH-P20L

- ◆ Aquaculture and hydroponics
- ◆ Food and beverage
- ◆ Agriculture and other applications

Specifications

Model	PH-P20F	PH-P20S	PH-P20L
pH			
Range	0.00 to 14.00pH		
Resolution	0.01pH		
Accuracy	±0.05pH		
Calibration Points	2 points		
pH Buffer Options	USA (pH4.01/7.00/10.01)		
Temperature			
Range	0 to 60°C		
Resolution	1°C		
Accuracy	±1°C		
General Specifications			
Temperature Compensation	0 to 60°C, automatic		
Hold Function	Manual		
Auto-Power Off	8 minutes after last key pressed		
Display	Single-line LCD (21×21mm)		
Power	3×1.5V LR44 micro alkaline batteries		
Battery Life	Approximately 150 hours of continuous use		
Dimensions	185(L)×40(Dia.)mm	240(L)×40(Dia.)mm	
Weight	100g		

Pocket pH Meter

PH-P30F PH-P30S PH-P30L




Features



Flat surface pH electrode is suitable for semisolids and flat surface pH measurements.



Circular glass bulb electrode fully senses the pH of liquids.

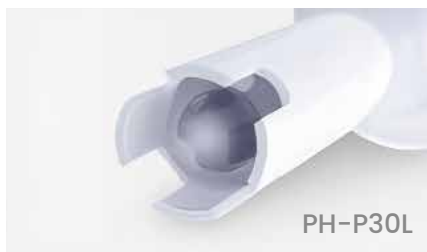

Long-reach pH electrode is suitable for measuring the pH value of samples inside small containers .

Features

High-accuracy pocket pH tester with a dual display LCD.

Auto-Read function senses and locks the measurement endpoint.

Auto-Power Off effectively conserves battery life.

Automatic temperature compensation ensures accurate readings over the entire range.

1 to 3 points calibration with automatic recognition for USA and NIST buffers.

Reset function automatically resumes all settings back to the factory defaults.

Setup menu allows to set the pH buffer group, number of calibration points, temperature unit, etc.

Replaceable electrode module reduces maintenance and replacement cost.

Waterproof feature to ensure complete protection in harsh environments.

Specifications

Model	PH-P30F	PH-P30S	PH-P30L
pH			
Range	-1.00 to 15.00pH		
Resolution	0.01pH		
Accuracy	±0.01pH		
Calibration Points	1 to 3 points		
pH Buffer Options	USA (pH4.01/7.00/10.01), NIST (pH4.01/6.86/9.18)		
Temperature			
Range	0 to 60°C/32 to 140°F		
Resolution	0.1°C/0.1°F		
Accuracy	±1°C/±1.8°F		
Offset Calibration	1 point		
Calibration Range	Reading ±10°C		
General Specifications			
Temperature Compensation	0 to 60°C/32 to 140°F, automatic		
Hold Function	Manual or auto-endpoint		
Auto-Power Off	8 minutes after the last key is pressed		
Display	Dual-line LCD (21×21mm)		
Power	2×1.5V AAA batteries		
Battery Life	Approximately 200 hours of continuous use		
Dimensions	185(L)×40(Dia.)mm	240(L)×40(Dia.)mm	
Weight	100g		



Pocket pH Meter

PH-P40



BNC connector is capable of connecting the different types of pH electrodes.



Manual temperature compensation allows to adjust the temperature value.



Auto-Power Off effectively conserves battery life.



Setup menu allows to set the pH buffer group, number of calibration points, temperature unit, etc.



1 to 3 points calibration with auto-buffer recognition.



Auto-Read function senses and locks the measurement endpoint.



Reset function automatically resumes all set back to the factory defaults.

Features



Water and wastewater treatment  
Aquaculture and hydroponics  
Environmental monitoring and other industrial applications

Specifications

Model	PH-P40
Range	-1.00 to 15.00pH
Resolution	0.01pH
Accuracy	±0.01pH
Calibration Points	1 to 3 points
pH Buffer Options	USA (pH4.01/7.00/10.01), NIST (pH4.01/6.86/9.18)
Temperature Compensation	0 to 100°C/32 to 212°F, manual
Hold Function	Manual or auto-endpoint
Auto-Power Off	8 minutes after last key pressed
Connector	BNC
Display	Dual-line LCD (21×21mm)
Power	2×1.5V AAA batteries
Battery Life	Approximately 200 hours of continuous use
Dimensions	175(L)×40(Dia.)mm
Weight	100g

# Pocket pH Meter

PH-BT10



## Description



1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers

Auto-Read function senses and locks the measurement endpoint

Password protection prevents the unauthorized calibration and settings



Automatic electrode diagnosis shows the pH slope and offset

Reset function automatically resumes all settings back to the factory defaults

Timed Interval Readings sends the measurement data to memory or printer

Multiparameter measurement allows up to be 3 testers connected to device and displays the measured values



Limit Alarm automatically alerts when reading exceeds the specified range

Calibration due alarm prompts user to calibrate the tester regularly



Solution temperature coefficient compensates for the pure water samples and references the pH to 25°C

Automatic temperature compensation ensures accurate readings over the entire range

## Features

**Ordering Information**

PH-BT10: Tester, pH buffer solutions and carrying case



## Specifications

Model	PH-BT10
<b>ph</b>	
Range	-2.000~20.000pH
Resolution	0.001, 0.01, 0.1pH, selectable
Accuracy	±0.002pH
Calibration Points	1 to 5 points
Ph Buffer Options	USA, NIST, DIN, 5 custom buffers
Temperature Compensation	0~100°C/32~212°F, automatic
Solution Temperature Coefficient	25°C
<b>mv</b>	
Range	+2000.0mV
Resolution	0.1,1mV, selectable
Accuracy	+0.2mV

# Online pH Meter

PH-OL620



## Description



1 to 3 points calibration with auto-buffer recognition



Selectable pH buffer set, including the USA and NIST options



Automatic temperature compensation ensures accurate readings over the entire range



Automatic electrode diagnosis helps the user decide whether to replace the sensor



Setup menu allows setting the number of calibration points, alarm limits, hysteresis value, 4 to 20mA output, etc.



Reset function automatically resumes all settings back to the factory defaults

## Specifications

Model	PH-OL620
<b>pH</b>	
Range	-1.00~15.00pH
Resolution	0.01pH
Accuracy	±0.01pH
Calibration Points	1 to 3 points
pH Buffer Options	USA(4.01/7.00/10.01),NIST(4.01/6.86/9.18)
<b>mV</b>	
Range	±1000mV
Resolution	1mV
Accuracy	±1mV
<b>Temperature</b>	
Range	0~100°C/32~212°F
Resolution	0.1°C/0.1°F
Accuracy	±1°C/±1.8°F
Offset Calibration	1 point, reading ±10°C
<b>Communication</b>	
Signal Output	4~20mA
Load	Max. 500Ω
Low or High Alarm	0.00~14.00pH, selectable
Communication Interface	RS485
Connection Terminals	Detachable screw terminals
<b>Other Specifications</b>	
Temperature Compensation	0~100°C, automatic
Environmental Conditions	Ambient temperature <60°C, relative humidity< 80%
Power Requirements	DC24v
Dimensions	96(L)× 96 (W)×75(H)mm
Weight	350g

# Benchtop pH Meter

BEP-M120





## Measurement Parameters

BEP-M120:  
pH, mV, relative mV, temperature

## ORP

1 point offset calibration allows adjusting the displayed value to a known standard  
Relative and absolute millivolt modes ensure the reliable ORP measurements

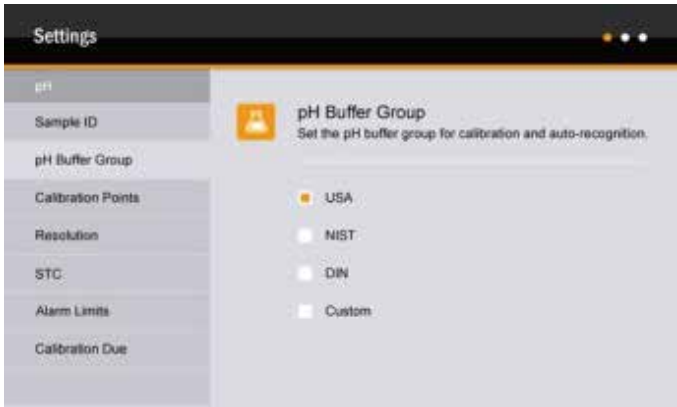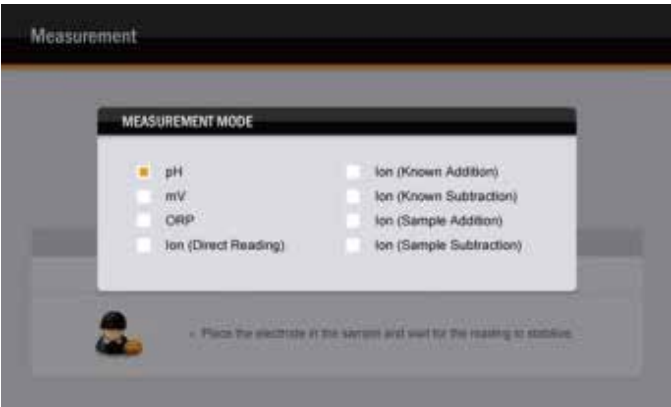

## pH

- 1 to 5 points calibration with automatic recognition for USA, NIST and DIN buffers
- Automatic electrode diagnosis shows the pH slope and offset
- Solution temperature coefficient compensates for the pure water samples and references the pH to 25°C

## Ion Concentration

- 2 to 5 points calibration, including the 8 concentration points can be selected
- Automatic electrode diagnosis shows the calibration points and slopes
- 2 to 5 points calibration from low to high concentrations
- Electrode management is capable of storing and recalling up to 3 electrode slopes
- Selectable ion measurement methods (direct reading, known addition, known subtraction, sample addition, sample subtraction) and concentration units (ppm, mg/L, mol/L or mol/L) Water Hardness
- Selectable measurement units (German degree, English degree, French degree, mmol/L and mg/L) are used for professional water hardness measurements





General Features



Auto-Read function senses and locks the measurement endpoint.



Timed Interval Readings sends the measurement data to a PC or printer.



Limit Alarm automatically alerts when reading exceeds the specified range.



Password protection prevents the unauthorized calibration and settings.




Reset function automatically resumes all settings back to the factory defaults.



Expanded memory stores or recalls up to 1000 data sets.



- Calibration due alarm prompts user to calibrate the meter regularly.
- Calibration report shows the date, time, pH slope and offset.

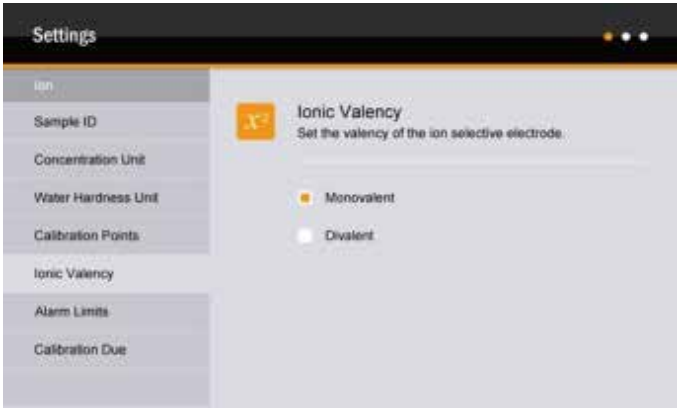

Specifications

Model	BEP-M120
<b>pH</b>	
Range	-2.000-20.000pH
Resolution	0.001,0.01, selectable
Accuracy	±0.002pH
Calibration Points	1 to 5 points
Ph Buffer Options	USA, NIST, DIN, 5 custom buffers
<b>ORP</b>	
mV Range	±2000.0mV
Relative mV Range	±2000.0mV
Resolution	0.1mV
Accuracy	±0.2mV
Calibration Points	1 point
<b>Temperature</b>	
Range	0~105°C/32~221°F
Resolution	0.1°C/0.1°F
Accuracy	±0.5°C/0.9°F
Offset Calibration	1 point, reading ±10°C
<b>Other Specifications</b>	
Temperature Compensation	0~100°C, manual or automatic
Solution Temperature Coefficient	25°C
Stability Criteria	Standard or high-accuracy
Calibration Due Alarm	1to 31 days or off
Interval Readings	10, 30, 60 seconds, 10, 30 minutes or off
Password Protection	4digits
Memory	1000 data sets
Communication Interface	USB
Connector	BNC, 3.5 mm jack socket
Display	7 inches TFT LCD
Power Requirements	DC12V power adapter
Dimensions	240(L)× 220 (W)× 80(H)mm
Weight	1.7kg

Benchtop pH Meter

PH-B25CW PH-B3CW PH-B3BW



Features



Economical bench top pH meter is equipped with a white backlit LCD display.



Automatic electrode slope display helps user decide whether to replace sensor.



2 points push-button calibration with auto-buffer recognition.



Automatic Temperature Compensation ensures accurate measuring result.



Meter Includes:

- pH electrode
- Temperature probe [Only for PH-B3BW meter]
- pH buffer pouches [pH4.01/7.00/10.01]
- DC9V power adapter

Specifications

Model	PH-B25CW	PH-B3CW	PH-B3BW
pH Range	0.00~14.00pH		
pH Accuracy	±0.05pH	±0.01pH	
Resolution	0.01pH		
Calibration Points	2 points		
Calibration Solutions	USA (pH4.01/7.00/10.01)		
Temperature Compensation	0~100°C,Manual		0~100°C,Manual or Automatic
mV Range	-1999~1999mV		
mV Accuracy	±10mV	±1mV	
Resolution	1mV		
Temperature Rage	/		0~100°C
Temperature Accuracy	/		±1°C
Resolution	/		1C
Hold Function	/		
Connector	BNC		
Display	LCD		
Power Requirements	DC9V/400mA power adapter		
Dimensions	210(L)×205(W)×65(mm)		
Weight	1.5Kg		

Portable pH Meter

PH-W2



Description

This pH meter is ideal for aquariums, aquaculture, fish hatcheries, food processing, laboratories, paper industry, swimming pools, schools and universities.

Features



High-sensitivity glass probe

Special material glass electrode probe, accurate and fast signal transmission.



High-definition large screen display

The reading on the large screen is clearer and more intuitive, which is suitable for the needs of acid and alkali measurement in various industries.



LR44 button battery

The button battery is used for electricity, which is easy to replace and durable. Recalibration is required after replacing the battery.



Easy to use & Convenient to carry

Small in size, with a clip design on the back for easy portability

Specification

Model	PH-W2
Measuring Range	0.00~14.00pH
Measuring Resolution	0.01pH
Measuring Accuracy	±0.1pH
Matching Electrode	Fixed pH sensor
Automatic Temp. Compensation	0℃~50℃
Working Environment	0℃~50℃ ; RH≤95%
Battery	2×1.5V
Dimension	155×31×16mm
Net Weight	102g