

Tissue Water Bath


TWB-1125



Features



Adopts new type heating element and heating block, which has long life and energy saving.

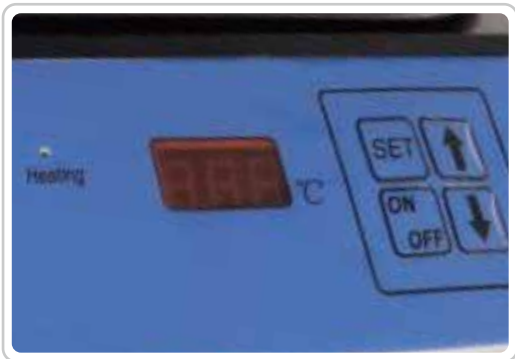

The measured temperature and set temperature are displayed separately.



Made of special black material, corrosion-resistant and wear-resistant.



It has a memory function and automatically retains the set temperature after operation.

Specification

Model	TWB-1125
Temperature Adjustment Range	30~90 °C continuously adjustable, automatic
Working Temperature	constant temperature
Temperature Control Accuracy	30~70 °C
Ambient Temperature	±2 °C
Electricity	0~40 °C
Power	AC 220V, 50/60Hz; AC 110V, 50/60Hz
External Dimension	250W
Dimension of Cylinder	340*340*120mm
Net Weight	265*190*60mm
	4.7kg

Tissue Water Bath

TSB-1



Advantages

High thermal conductivity separate pot design, can quickly heat up and easy to take out water change and cleaning;

There is an independent high precision temperature controller in the spreading pan which can directly detect the water temperature and accurately and stably control the spreading temperature;

The water divider can be configured in the pan to support the flexible partition of the water in the pan, and can effectively clean the water debris.



Features

- Touch interface.
- Intelligent PID temperature control system.
- Triple temperature control protection system.
- Universal angle lighting system.
- Free division function of water area.
- Surface debris cleaning function.
- Separate structure design of water bath dish.

Specification

Model	TSB-1
Dimensions of Water Bath Dish	247*182*55 mm
Capacity of Water Bath Dish	2.3L
Temperature Range	0~99 °C
Temperature Control Precision	±1 °C
Lighting Brightness	0~5 level (adjustable)
Working Voltage	AC 110V~120V / AC 220V~240V
Frequency	50Hz / 60Hz
Power	900W
Fuse	F6A L 250V / F12A L 125V
Safety of Electric	I
Ambient Temperature	5 °C ~45 °C
Relative Humidity	≤80%
Air Pressure Range	700hPa~1060hPa
External Dimension	330*375*130mm
Net Weight	5kg

Tissue Water Bath

TSB-2



Features



Imported single-chip microprocessor control, easy operation and reliable performance.

Imported large display screen with clear characters, and displayed data can be clearly observed at any angle.

Features

- All parameters including setting temperature, working temperature and working status are displayed on the same screen in real time, making the data more intuitive.
- Adopts imported temperature measurement integrated module, PID control heating mode, high precision.
- New heating element, fast heating, even heating and long service life.
- With memory function, the set temperature is automatically retained after operation.
- With the function of timing on and off. It can be preset to turn on and off at any time during any day of the week, making it more convenient for users to control working hours.
- Made of special black material, which is resistant to corrosion and wear.

Specifications

Model	TSB-2
Temperature Range	RT.-99℃
Temperature Control Accuracy	+ 1℃
Dimensions of Water Bath Dish	280*240*70mm
Electricity	AC 220V/50Hz; AC 110V/60Hz
Power	400VA
Fuse	F6A L 250AC
Dimensions (W*D*H)	350*420*130mm
Weight	8kg